

# SCREW-IN SENSOR




**KNE:** resistance type

**Description:**

Resistance temperature sensor with connection head and metal thermowell. Thread mounting: M33x2. Design: with neck. Especially for temperature measuring of pressurized agents. Material of neck: KO33.

Temperature: -200...+600°C, -50...+400°C

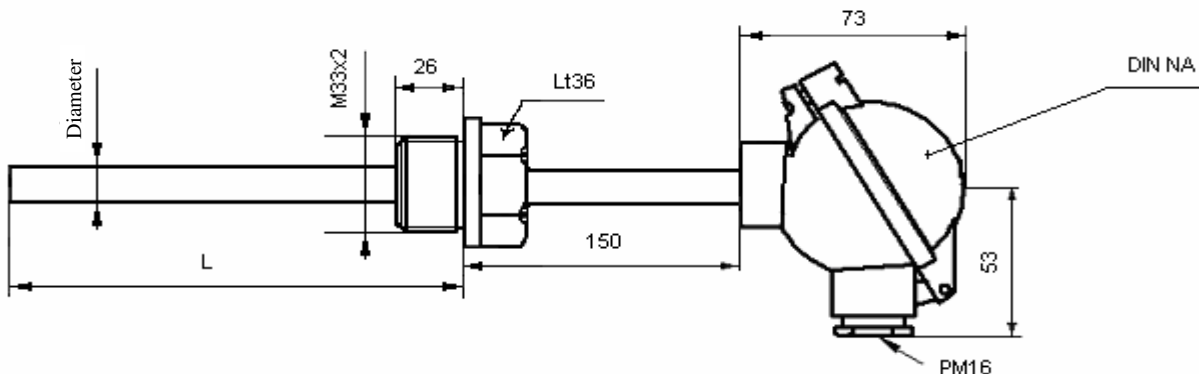

**Ordering code:**

<b>K</b>	<b>N</b>	<b>E</b>														
----------	----------	----------	--	--	--	--	--	--	--	--	--	--	--	--	--	--

**MEASURING-ELEMENT:**

Resistance type: *Pt100*  
*Other*

1  
9

Class of accuracy: *A*  
*B*  
*Other*

A  
B  
9

Construction: *Single*  
*Double*  
*Triple*

1  
2  
3

Connection: *2 wire*  
*3 wire*  
*4 wire*

2  
3  
4

Measuring range: *-200...+600° C*  
*-50...+400° C*

1  
2

**THERMOWELL, CONNECTION :**

Material of thermowell: *1.4301*  
*1.4541*  
*Other*

1  
2  
9

Diameter of thermowell [mm]: *10*  
*11*  
*12*  
*Other*

1 0  
1 1  
1 2  
9 9

Length of thermowell [mm]:

Head: *Non adjustable*  
*Adjustable*

0  
1

**ACCESSORIES ON REQUEST:**

Head mounted transmitter ( 4-20 mA ):  
*Not order*  
*Order*

0  
1

**Naturally, we can differ from the above construction.**

Please, fill in the ordering code and send your enquiry (order) to us.

fax: 00-36-1-282-6135 , e-mail: [ugyfelsz@rhodium.hu](mailto:ugyfelsz@rhodium.hu) , We will discuss the details.

If you have question, please call: 00-36-1-282-5689 and 00-36-1-282-8308, Our customer service is available.